

VALTORC

WWW.VALTORC.COM
AJBENTAL@VALTORC.COM
1 (866) VALTORC

3A CONCENTRIC SANITARY CHECK VALVE

SERIES 540-SN




STAINLESS STEEL FLOW CONTROL EQUIPMENT
FOR THE FOOD, BEVERAGE, DAIRY, COSMETICS,
BIOTECHNOLOGY, PHARMACEUTICAL AND
ELECTRONICS PROCESSING INDUSTRIES

3A Concentric Check Valve

This finely crafted 316L stainless steel check valve offers maximum quality that meets all 3A standards. With a unique clamp design, a simple twist of the wing nut permits quick disassembly without tools. The stainless steel spring in this superior valve assures positive closure and smooth operation. This valve is designed for vertical as well as horizontal applications.

SIZE	A	STOCK NO.
1/2"	3-1/2"	384559VT
3/4"	3-1/2"	384442VT
1"	4-1/8"	384833VT
1 1/2"	4-9/16"	384442VT
2"	5-1/16"	384544VT
2 1/2"	5-3/8"	383443VT
3"	6-1/8"	384411VT
4"	8-1/8"	384999VT
6"	8-1/8"	384998VT

540-SN
 Standard Disc
 Type Check
 Valve (3A)

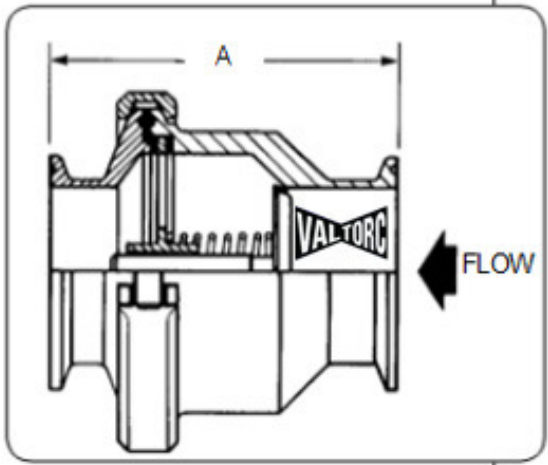

SIZE	A	STOCK NO.
1/2"	3-1/2"	N/A
3/4"	3-1/2"	N/A
1"	4-1/8"	38451442VT
1 1/2"	4-9/16"	38459903VT
2"	5-1/16"	38453222VT
2 1/2"	5-3/8"	38456764VT
3"	6-1/8"	38459980VT
4"	8-1/8"	38454889VT
6"	8-1/8"	38450082VT

540-SN
 Guide Finger
 Disc Type
 Check Valve

FEATURES

- Suitable for C.I.P.
- Operating pressure to 150 psi
- Temperature from 30°F min. to 225°F max.
- Standard end connection-clamp type (butt weld & TI-Line upon request)
- Guide finger disc available upon request.
- Standard seals-FDA Viton (EPDM & other elastomers upon request)
- Internal finish-25 to 30ra average
- Material Test Reports provided upon request
- Eccentric Type available upon request
- For steam applications consult factory