WWW.VALTORC.COM AJBENTAL@VALTORC.COM 1 (866) VALTORC

Arnot

INDUSTRIAL BALL VALVES SERIES 250

GROOVED-END

VALTORG

*EQUAL TO VICTAULIC[™] BRAND



WWW.VALTORC.COM AJBENTAL@VALTORC.COM 1 (866) VALTORC




SIZE	Α	B (GE)	С	D	K (GE)	L (GE)	M (GE)	N (GE)
	mm	mm	mm	mm	mm	mm	mm	mm
2"	50	171.45	98.7	180	60.3	57.15	7.93	15.88
3"	80	203.20	142.1	300	88.9	84.94	7.93	15.88
3" sp	8.0	254.0	142.1	300	88.9	84.94	7.93	15.88


*EQUAL TO VICTAULIC™ BRAND

INDUSTRIAL BALL VALVES SERIES 250

FEATURES / SPECIFICATIONS:

- -ASTM 316 stainless construction
- -Reinforced teflon, 3-piece "chevron" style packing - expands outward as it is compressed to seal
- -Victaulic style grooved connections
- High quality investment cast body and end caps
- Designed for quick disconnect service
- -100% air tested underwater at the factory
- -Blowout proof stem design
- -Locking handle is standard
- -Available in 2" & 3" sizes
- -Options: 3" in 8" or 10" length

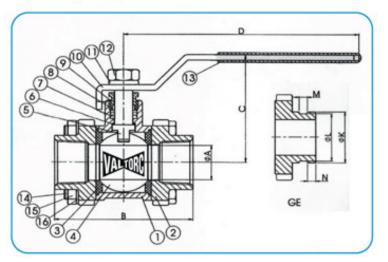

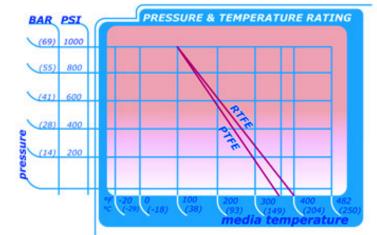

Item	Part name	Material	Oty
1	body	ASTM A351.CF8M/SS316	1
2	end cap	ASTM A351.CF8M/SS316	2
3	seats	PTFE + 15% G.F.	2
4	ball	ASTM A351.CF8M/SS316	1
5	stem	SS316	1
6	gasket	PTFE	1
7	seal	PTFE	1
8	gland bush	PTFE	1
9	packing gland	SS304	1
10	handle	SS304	1
11	lever spring washer	SS304	1
12	lever nut	SS304	1
13	handle cover	VINYL	1
14	bolts	SS304	4
15	bolt nuts	SS304	4/8
16	spring washers	SS304	4/8